


KOOK 90

Wood Insertion Cookers



Nominal power	kW	7,5
Reduced power	kW	-
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	82,5
Reduced efficiency	%	-
Heating volume (min-max)	m ³	180
Nominal CO at 13% O ₂	%	0,07
Reduced CO at 13% O ₂	%	-
Nominal dust content at 13% O ₂	mg/Nm ³	27
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Wood
Hourly consumption (min-max)	kg/h	2,2
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	60
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	6,9
Exhaust fumes temperature (max)	°C	264
Net weight	kg	128
Gross weight	kg	138
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-

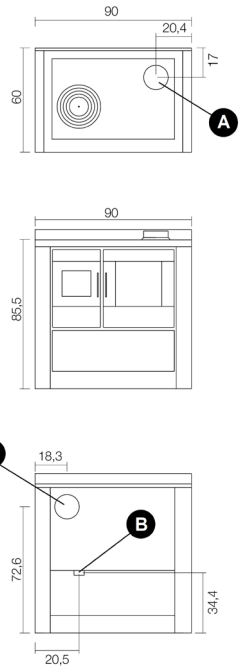


MATCH

71150040	NEUTRAL STRUCTURE with cast iron Top	EAN 8033123617192
71150041	NEUTRAL STRUCTURE with cast iron Top with ventilation + light kit	EAN 8033123617208
71150070	NEUTRAL STRUCTURE with glass-ceramic Top	EAN 8033123617253
71150071	NEUTRAL STRUCTURE with glass-ceramic Top with ventilation + light kit	EAN 8033123617260
6915039	Stainless steel	EAN 8033123616850
6915038	Anthracite steel	EAN 8033123616843
6915052	White steel	EAN 8033123617123
6915037	Black steel	EAN 8033123616836

PLUS




STOVE PACKING



L (cm)	H (cm)	P (cm)
97	102,1	79


VOLUME (m ³)
0,78

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	60	13,5	80

STOCKING



TRANSPORT

