




Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,51
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	89
Reduced efficiency	%	93,9
Heating volume (min-max)	m ³	65 - 223
Nominal CO at 13% O ₂	%	0,009
Reduced CO at 13% O ₂	%	0,021
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	265 - 107
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	3,2 - 2,1
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 119
Dust content at 13% O ₂ (min-max)	mg/Nm ³	18 - 18,8
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,18
Autonomy (min-max)	h	6,9 - 25
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,8
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,8 - 5,7
Exhaust fumes temperature (max)	°C	190
Net weight	kg	105
Gross weight	kg	117
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting capability up to	m	6



Art. 15A B-VG 2015
BImSchV 2016
Regensburg
München
Stuttgart
Aachen

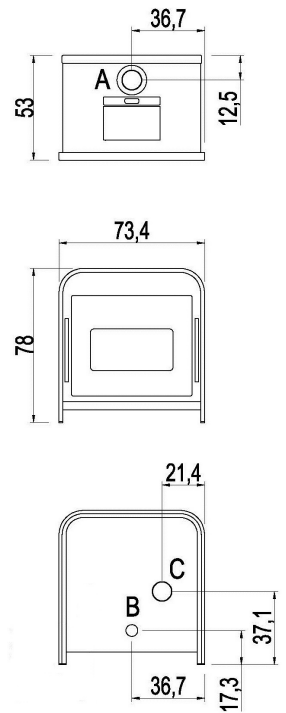

MATCH

702006	Black steel	EAN 8053859012726
702005	Anthracite steel	EAN 8053859012733
702004	Light bronze steel	EAN 8053859012740
OPTIONAL :		
5018009	Ducting Kit	EAN 8053859010333
5018013	Pellet loading chute kit	EAN 8053859010494

PLUS



Cast iron burning pot



Sealed chamber



Ducting Kit (optional)



Aluminum auger



Connection to the external thermostat



Comfort mode



Concentric flue kit



Upper exhaust



Cast iron inner



Daily weekly programming




Remote control



Integrated Wi-Fi


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	95	70


VOLUME (m ³)
0,53

LINING PACKING




L (cm)	H (cm)	P (cm)
-	-	-

STOCKING



TRANSPORT



57 pcs