




Nominal power	kW	10
Reduced power	kW	3
Introduced thermal power (max)	kW	11
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	91
Reduced efficiency	%	94,5
Heating volume (min-max)	m ³	72 - 240
Nominal CO at 13% O ₂	%	0,0095
Reduced CO at 13% O ₂	%	0,0139
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	174 - 119
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	5,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 104
Dust content at 13% O ₂ (min-max)	mg/Nm ³	10 - 17
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,66 - 2,24
Autonomy (min-max)	h	6,7 - 22,7
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	85,2
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (max)	°C	215
Net weight	kg	103
Gross weight	kg	121
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting capability up to	m	6

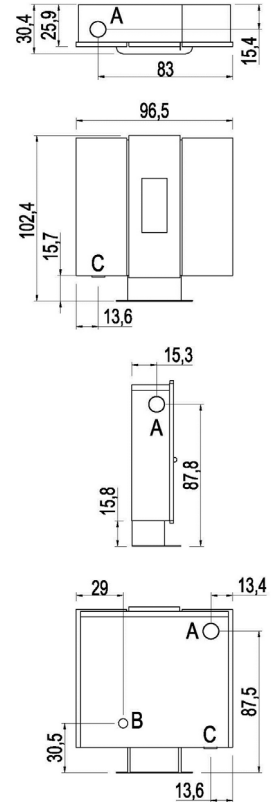


MATCH

7017032	NEUTRAL STRUCTURE	EAN 8033123618311
6913025	White steel	EAN 8033123612876
6913024	Red steel	EAN 8033123612883

PLUS

Cast iron burning pot	Sealed chamber	Duction with 1 independent motor
Aluminium Auger	Connection to the room thermostat	Comfort mode
Upper, back and lateral exhaust	Wi-Fi kit (optional)	Daily weekly programming
Remote control		


STOVE PACKING



L (cm)	H (cm)	P (cm)
120	54,6	100


VOLUME (m ³)
0,66

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	37,6	10	98,5
majolica	37,6	10	98,5

STOCKING



TRANSPORT

