KOOK 70 4.0

Wood Insertion Cookers

Nominal power	kW	6,2
Reduced power	kW	-
Introduced thermal power (max)	kW	7,4
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	84,1
Reduced efficiency	%	-
Heating volume (min-max)	m^3	149
Nominal CO at 13% O_2	%	0,097
Reduced CO at 13% O_2	%	-
Emissions CO (13% O2) (min-max)	mg/Nm^3	1209
Emissions OGC (13% O2) (min-max)	mg/Nm^3	69
Emissions NOX (13% O2) (min-max)	mg/Nm^3	78
Dust content at 13% O_2 (min- max)	mg/Nm^3	29,8
Boiler capacity (H_2O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	1,7
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	7,3
Exhaust fumes temperature (max)	°C	168
Net weight	kg	128,1
Gross weight	kg	142,3
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

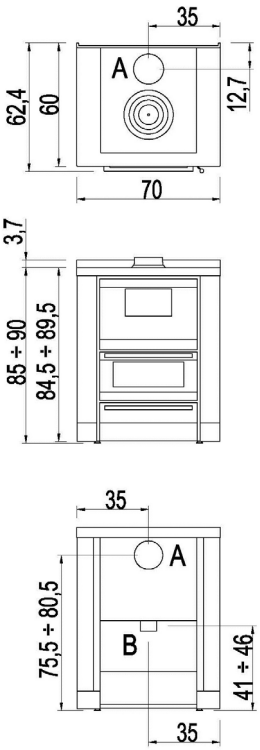

EN 12815:2001/ A1:2004/AC:2007 · Art. 15A B-VG 2015 BImSchV 2015 Regensburg München Stuttgart Aachen · ECO DESIGN 2022 conforming · A+

MATCH

71180070	NEUTRAL STRUCTURE	EAN 8053859010562
71180071	NEUTRAL STRUCTURE with ventilation + light kit	EAN 8053859010579
6915039	Stainless steel	EAN 8033123616850
6915038	Anthracite steel	EAN 8033123616843
6915052	White steel	EAN 8033123617123
6915037	Black steel	EAN 8033123616836

	OPTIONAL	
5018015	Top	EAN 8053859012863

PLUS

- Cooking
- Central Top and back exhaust
- Refractory stone inner with 2nd combustion air
- OPTIONAL Ventilation + light kit
- View on the oven
- Built - in

STOVE PACKING



L (cm)	H (cm)	P (cm)
77	100,5	79

VOLUME (m^3)
0,61

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	60	13,5	80

STOCKING

Nr (max)
3

TRANSPORT



51 pcs