


KOOK 60 4.0

Wood Insertion Cookers



Nominal power	kW	6,2
Reduced power	kW	-
Introduced thermal power (max)	kW	7,4
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	84,1
Reduced efficiency	%	-
Heating volume (min-max)	m ³	149
Nominal CO at 13% O ₂	%	0,097
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	1209
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	69
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	78
Dust content at 13% O ₂ (min-max)	mg/Nm ³	29,8
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	1,7
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	7,3
Exhaust fumes temperature (max)	°C	168
Net weight	kg	121,6
Gross weight	kg	135,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

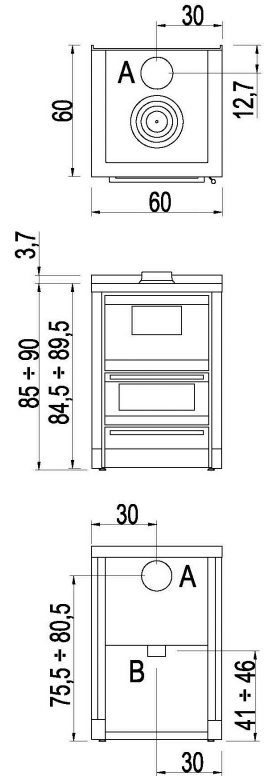


MATCH

71180060	NEUTRAL STRUCTURE	EAN 8053859010548
71180061	NEUTRAL STRUCTURE with ventilation + light kit	EAN 8053859010555
6915036	Stainless steel	EAN 8033123616829
6915035	Anthracite steel	EAN 8033123616812
6915051	White steel	EAN 8033123617116
6915034	Black steel	EAN 8033123616805


OPTIONAL

5018015	Top	EAN 8053859012863
---------	-----	-------------------

PLUS

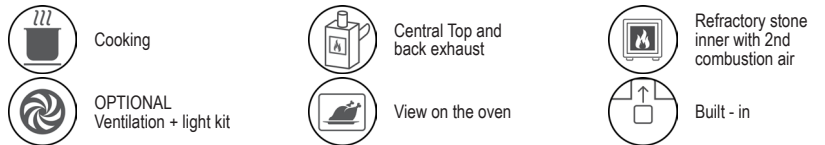


STOVE PACKING



L (cm)	H (cm)	P (cm)
77	100,5	79


VOLUME (m ³)
0,61

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	60	13,5	80

STOCKING



TRANSPORT

