





Nominal power	kW	28,62
Reduced power	kW	7,76
Introduced thermal power (max)	kW	30,56
Nominal water useful power	kW	26,99
Reduced water useful power	kW	6,28
Nominal efficiency	%	93,68
Reduced efficiency	%	94,79
Heating volume (min-max)	m ³	186,24 - 686,88
Nominal CO at 13% O ₂	%	0,008
Reduced CO at 13% O ₂	%	0,018
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	223 - 104
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	5,8 - 1,9
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	98,6 - 126,1
Dust content at 13% O ₂ (min-max)	mg/Nm ³	17,2 - 20,9
Boiler capacity (H ₂ O)	l	38
Hopper capacity	kg	48
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	1,7 - 6,33
Autonomy (min-max)	h	7,6 - 28,2
Ignition electrical absorption (max)	W	380
Operating electrical absorption (max)	W	92
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	9,9
Exhaust diameter	mm	100
Combustion air inlet diameter	mm	80
Mass of smoke (min-max)	g/sec	11,6 - 25,2
Exhaust fumes temperature (max)	°C	88,7
Net weight	kg	265
Gross weight	kg	287
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

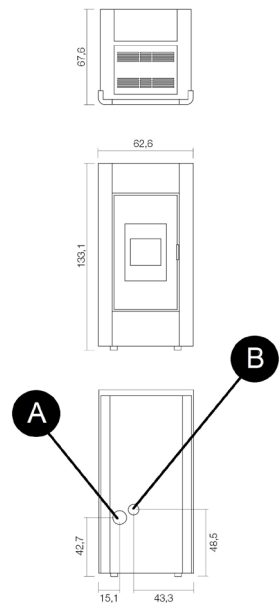


MATCH

7018036	NEUTRAL STRUCTURE	EAN 8053859010456
6918019	White steel	EAN 8053859010241
6918018	Red steel	EAN 8053859010234

PLUS

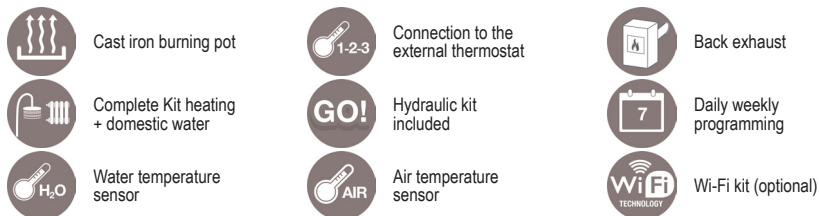


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	131,8	70


VOLUME (m ³)
0,74

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	59,1	12,5	109,2

STOCKING



TRANSPORT

